

Alnico Gen2 Series, 6Gbps SAS to 6Gbps SAS/SATA JBOD Subsystems Installation Guide

Version 1.0

Oct./10/2011

Copyright ©2011

This guide and any accompanying software and firmware are copyrighted. No parts of this publication may be reproduced, stored on a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopy, recording, or otherwise, without prior written consent except for copies retained by the purchaser for backup purposes.

All rights Reserved- Printed in Taiwan.

Notice

We make no warranties with respect to this documentation either express or implied and provide it "as it". This includes but is not limited to any implied warranties of merchantability and fitness for a particular purpose. The information in this document is subject to change without notice. We assume no responsibility for any errors that may appear in this document.

The manufacturer shall not be liable for any damage, or for the loss of information resulting from the performance or use of the information contained herein

Trademarks

Product names used herein are for identification purposes only and may be the trademarks of their respective companies. All trademarks or registered trademarks are properties of their respective owners.

Regulatory information



For Europe

This drive is in conformity with the EMC directive.



Federal Communications Commission (FCC)

Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules.

Those limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antennas.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Warning:

A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used.

Use only shielded cables to connect I/O devices to this equipment.

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

About This Installation Guide

Welcome to Hardware Installation Guide. This guide is designed to be used as step-by-step instructions for installation of your subsystem, and covers everything you need to know in learning how to operation, troubleshooting and future upgrades. For the detail about how to configure your subsystem, please refer to the Software Operation manual.

Symbols in Text

These symbols may be found in the text of this guide. They have the following meanings.



Caution

Caution

This icons indicates that failure to follow directions could result in personal injury, damage to your equipment or loss of information.



NOTE

Note

This icon presents commentary, sidelights, or interesting points of information .

Important terms, commands and programs are put in **Boldface** font.

Screen text is given in **screen** font.

Contents

ABOUT THIS INSTALLATION GUIDE	IV
SYMBOLS IN TEXT	IV
CONTENTS.....	V
CHAPTER 1. INTRODUCTION	1
MODEL VARIATIONS	1
FEATURES	1
UNDERSTANDING THE ALNICO RAID SUBSYSTEM.....	2
<i>Front Panel Overview</i>	2
<i>Rear Panel Overview</i>	4
CHAPTER 2. INSTALLATION.....	9
UNPACKING & CHECKING THE EQUIPMENT	9
WHAT ELSE YOU NEED	9
ESD PRECAUTION	10
INSTALLING HARD DISKS	10
INSTALL THE ALNICO JBOD SUBSYSTEM IN A RACK.....	11
SYSTEM CONNECTION	13
CONNECTION TO THE RAID SYSTEM (BASIC)	14
CONNECTION TO THE RAID SYSTEM WITH MORE SAS JBODS.....	15
TURNING ON FOR THE FIRST TIME.....	16
TURNING OFF	16
CHAPTER 3. TROUBLE SHOOTING	17
REPLACE THE EXPANDER BOX	17
HOT SWAPPING TO REPLACE THE FAN MODULE.....	18
HOT SWAPPING TO REPLACE THE POWER MODULE.....	19
APPENDIX A. CONNECTORS	22
APPENDIX B. FIRMWARE UPDATING	23
APPENDIX C.	25
COMMAND LINE INTERFACE (CLI).....	25
CREATE A CLI CONNECTION	25
CLI COMMAND SET	25
APPENDIX D. SPECIFICATIONS.....	36

Chapter 1. INTRODUCTION

This chapter introduces the features and capabilities of Alnico 6Gb SAS to 6Gb SAS/SATA JBOD subsystems.

You will find:

- ⇒ A full introduction to your JBOD SYSTEM
- ⇒ Details of key features and supplied accessories
- ⇒ A checklist of package contents
- ⇒ A checklist of what else you need to start installation

Model Variations

There are three available models in Alnico Gen 2 JBOD subsystem series; which utilize Single 6Gbps miniSAS as Host interface and dual 6Gbps miniSAS connector for expansion, each with 12, 16, or 24 device bays.

<i>Model Name</i>	<i>Host Interface</i>	<i>Device bays</i>	<i>Controller Numbers</i>
AN-624J6	SAS (miniSAS)	24 bays	1 or 2
AL-616J6	SAS (miniSAS)	16 bays	1 or 2
AL-612J6	SAS (miniSAS)	12 bays	1 or 2

Features

The JBOD SYSTEM is designed to meet today's large volume and excellent performance storage requirements in rapidly changing business environment. It provides a maximum data protection and exceptional performance in a storage subsystem. Target usage ranges are set from small business to departmental and corporate server needs. The JBOD SYSTEM is designed for easy integration, smooth data expansion and server migration.

The JBOD SYSTEM supports the following features:

- Supports 6Gb SAS/SATA disk drives.
- Single 4x wide-port SAS connectors for host connection.


- Dual 4x wide-port SAS connectors for expander module daisy chain.
- Redundant and Hot Swappable JBOD expander I/O board, Fan, Power and Drives.
- Completely monitored by In-band SES.
- Configuration and environmental information is accessible either via the Serial Port or RAID System.
- Load sharing, hot swappable redundant power system with PFC function.






Understanding the Alnico RAID subsystem

Front Panel Overview

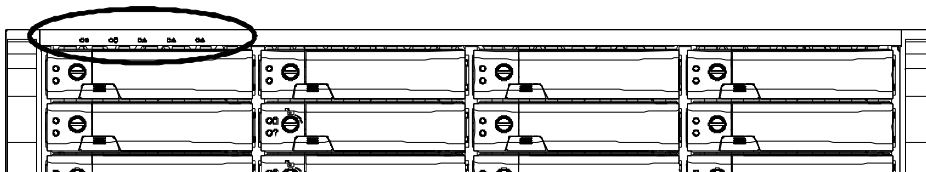LED Indicators

LED Indicators




1.  Power On Indicator (Blue).
2.  Host System Access Indicator (Blue + blink).
3.  Power Fail Indicator (Red)
4.  Fan Fail Indicator (Yellow)
5.  Over Temperature Indicator (Yellow)

Driver Bay numbering convention


The enclosure bay numbering convention is shown in following figure. A bay is designed to house a single 3,5-inch hard disk drive or a 2.5" hard disk in his

carrier module.


AN-624J6

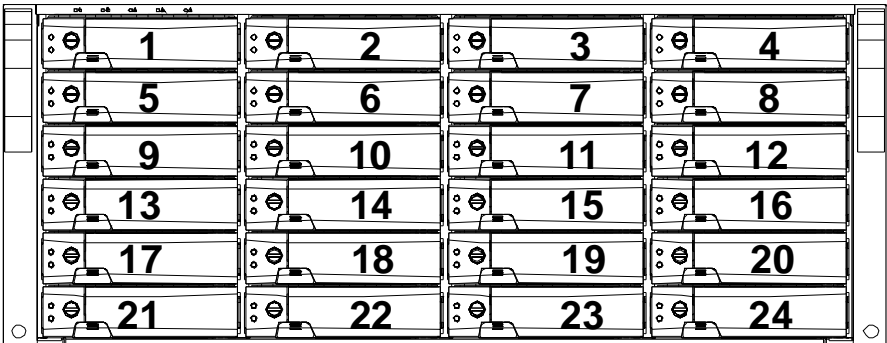


AN-616J6

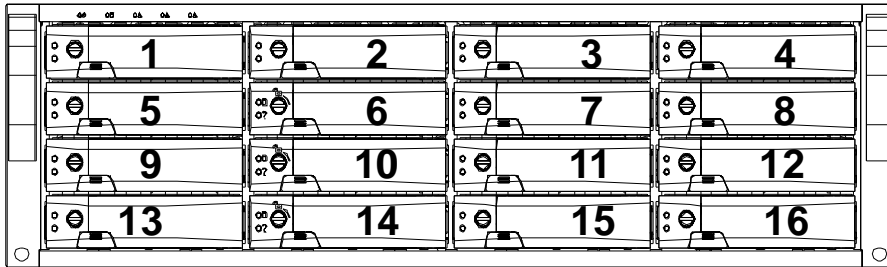

AN-612J6

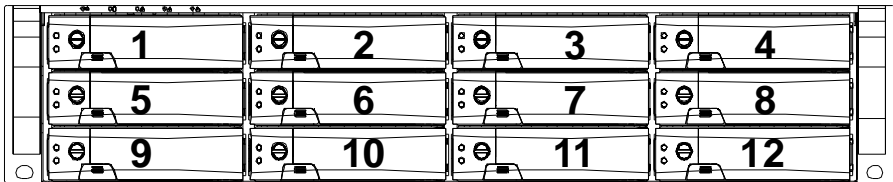


Drive Bay

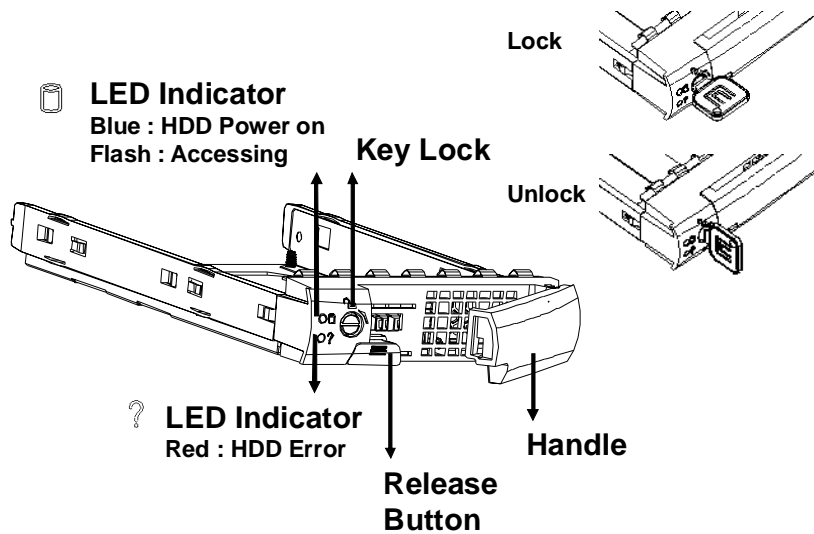

Rear Panel Overview

AN-624J6 24bays 6Gb SAS to 6Gb SAS/SATA JBOD SUBSYSTEM

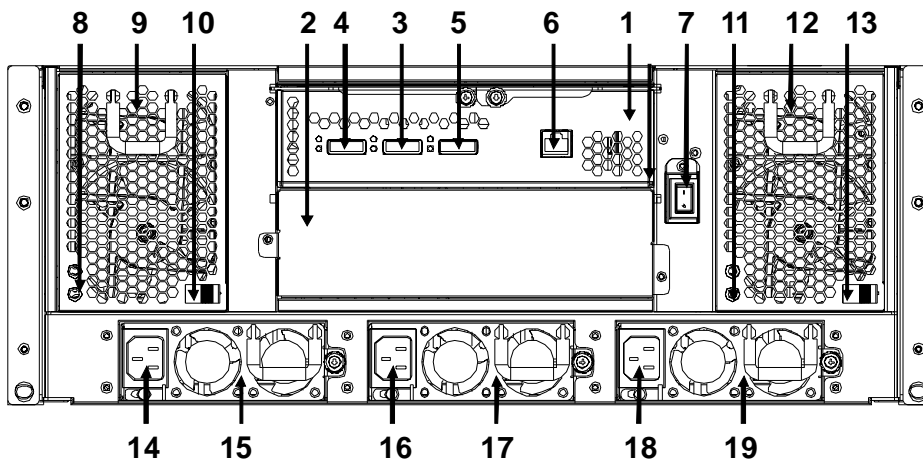

1. Expander Box 1.
2. Expander Box 2
3. SAS CH 0 & LED Indicator
4. SAS Expand Port 1 & LED Indicator


LED	Colors	Indicate
SAS	Green	Link
	Blue + Blink	Access

5. SAS Expand Port 0 & LED Indicator

LED	Colors	Indicate
SAS	Green	Link
	Blue + Blink	Access

6. Console
7. Power Switch
8. FAN failure indicator (Rear / Front)
9. FAN Module 1
10. FAN Module 1 latch
11. FAN failure indicator (Rear / Front)
12. FAN Module 2
13. FAN Module 2 latch
14. AC inlet 1 & Ltch
15. Power Module 1
16. AC inlet 2 & Latch
17. Power Module 2
18. AC inlet 3 & Latch
19. Power Module 3

AN-616J6 16bays 6Gb SAS to 6Gb SAS/SATA JBOD SUBSYSTEM

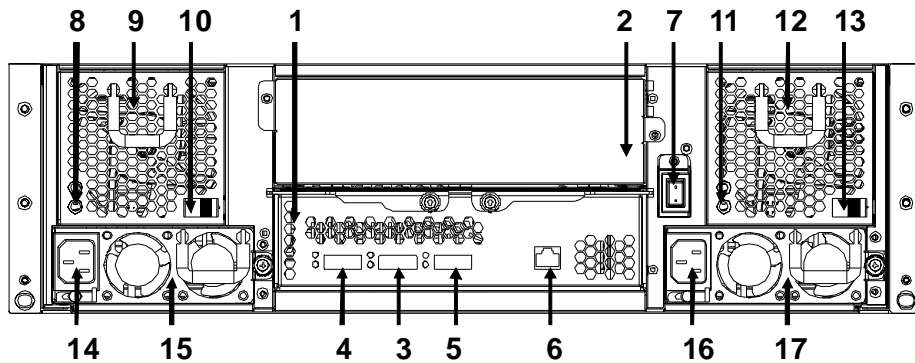

- 1. Expander Box 1.
- 2. Expander Box 2
- 3. SAS CH 0 & LED Indicator
- 4. SAS Expand Port 1 & LED Indicator

LED	Colors	Indicate
SAS	Green	Link
	Blue + Blink	Access


- 5. SAS Expand Port 0 & LED Indicator

LED	Colors	Indicate
SAS	Green	Link
	Blue + Blink	Access

- 6. Console
- 7. Power Switch
- 8. FAN failure indicator (Rear / Front)
- 9. FAN Module 1
- 10. FAN Module 1 latch
- 11. FAN failure indicator (Rear / Front)
- 12. FAN Module 2
- 13. FAN Module 2 latch
- 14. AC inlet 1 & Ltch
- 15. Power Module 1

- 16. AC inlet 2 & Latch
- 17. Power Module 2

AN-612J6 12bays 6Gb SAS to 6Gb SAS/SATA JBOD SUBSYSTEM

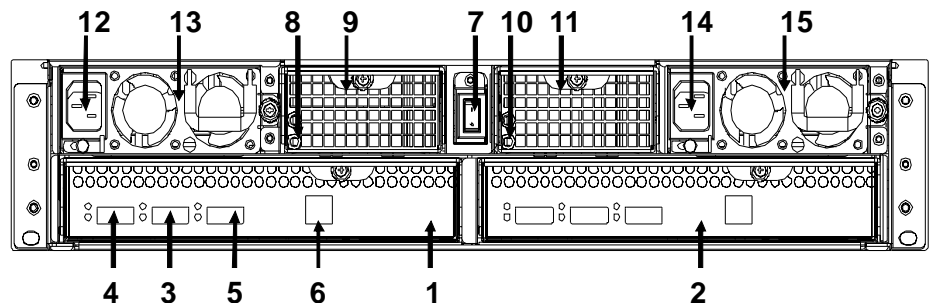

- 1. Expander Box 1.
- 2. Expander Box 2
- 3. SAS CH 0 & LED Indicator
- 4. SAS Expand Port 1 & LED Indicator

LED	Colors	Indicate
SAS	Green	Link
	Blue + Blink	Access

- 5. SAS Expand Port 0 & LED Indicator

LED	Colors	Indicate
SAS	Green	Link
	Blue + Blink	Access

- 6. Console
- 7. Power Switch
- 8. FAN failure indicator 1.(Rear / Front)
- 9. FAN Module 1
- 10. FAN failure indicator 2 (Rear / Front)
- 11. FAN Module 2
- 12. AC inlet 1 & Latch

- 13. Power Module 1
- 14. AC inlet 2 & Latch
- 15. Power Module 2

Chapter 2. INSTALLATION

This chapter presents:

- ⇒ **Instructions on unpacking & checking the equipment**
- ⇒ **Instructions on how to install Hard disk drive**
- ⇒ **Instructions on how to install Alnico JBOD in a Rack.**
- ⇒ **Instructions on how to connect Alnico JBOD.**

Unpacking & checking the Equipment

Before unpacking the Alnico JBOD subsystem, prepare a clean, stable surface to put on the contents of Alnico JBOD shipping container. Altogether, you should find following items in the package:

Alnico 6Gb SAS to 6Gb SAS/SATA JBOD Subsystem :

- JBOD subsystem x1
- CD-ROM x 1 (Includes Hardware Installation Guide).
- Serial cable x1
- Power Cord x 2 (AN-616J6 and AL-612J6), Power Cord x 3 (AN-624J6)
- SAS cable (SFF-8088) x 1
- Drive Bay, (AN-612 x 13, AN-616 x 17, AN-624 x 25)
- Rails for Rack
- Mounting screws : for 2.5" disks (bag) × 1 / for 3.5" disks (bag) × 1

What else you need

- Hard disk drives (different RAID levels requires different numbers of HDDs. Refer to Software Operation manual for more detail information).
- Host computer with SAS interface or Alnico SAS RAID subsystem.
- Dedicated terminal or PC with third party communication software that supports ANSI terminal emulation (required for viewing Monitor Utility)

ESD Precaution


Use a suitable anti-static wrist or ankle strap and observe all conventional ESD precaution when handle Alnico JBOD's modules and components. Avoid contact with backplane components and module connectors.

Installing hard disks

The Alnico JBOD series includes 16 hot swappable drive bays. The following sections describe how to install disks into Alnico JBOD subsystems.


Loading 2.5" Hard Disk to the drive bay.

1. Put 2.5 HDD into the bay.
2. Fasten all 4 screws to mount HDD in the bay and make sure the HDD is properly tightened.

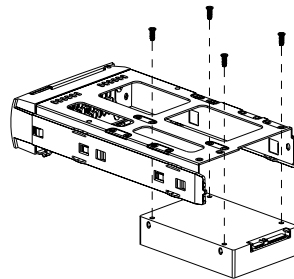

Loading 3.5" Hard Disk to the drive bay.

1. Put 3.5 HDD into the bay.
2. Fasten all 4 screws to mount HDD in the bay and make sure the HDD is properly tightened.

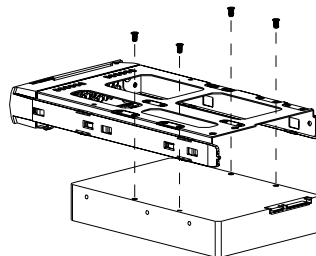

Place drive bays back into the system

1. Slide in drive bay, make sure the handle is open fully.
2. Close the handle to engage the drive bay into the slot.

**NOTE**

Note

The hard drives in a JBOD should match in size and speed. All drives in any array should be identical models with the same firmware versions.

**Caution**

Caution

Only use the screws offered with Alnico RAID subsystem. Longer screws might cause the drive damage.

All the drive bays (with or without hard drive) must be placed in the Alnico subsystem. Alnico's cooling system is designed with full of drive bays. Missing drive bays might cause the subsystem damage.

Install The Alnico JBOD subsystem in a Rack

You are shipped one rackmounting kit for each Alnico subsystem that you intend to rackmount. Alnico subsystem is designed for installation into a industry-standard 19-inch rackmount cabinet. Following the use of this section for installing the Alnico subsystem into a Rack

Install the Slide Rails

1. Combine Left slide rail and rear slide rail.
2. Measure the depth of the rack enclosure, then fasten 4 of P4*8M screws into M4 Locking nuts to fix the length.
3. Use T5*8M screws and PW14 washer to install the left slide on Front and rear Posts of Rack as Figure 1.
4. repeat procedure 1 ~ 3 to install the right Slide into the Rack.

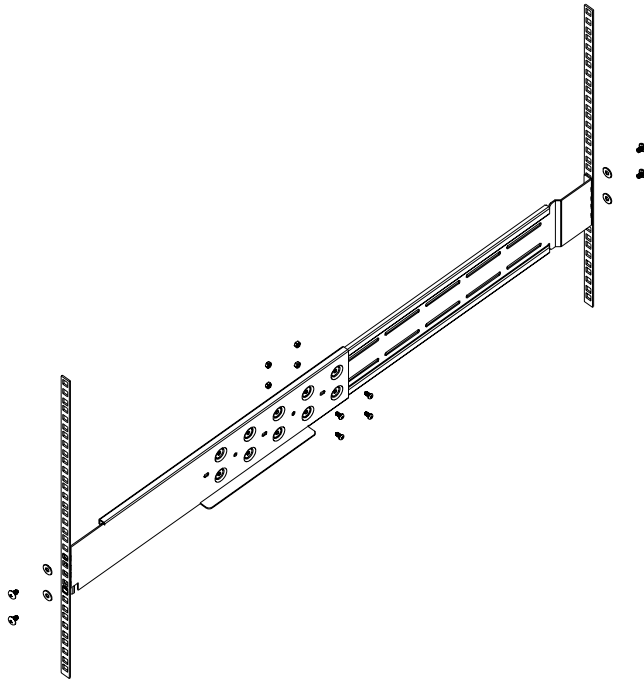


Figure 1.

Place the Alnico Subsystem into the rack

1. Lift the subsystem enclosure and slide it slowly and gently along the slide rail into the rack as Figure 2.

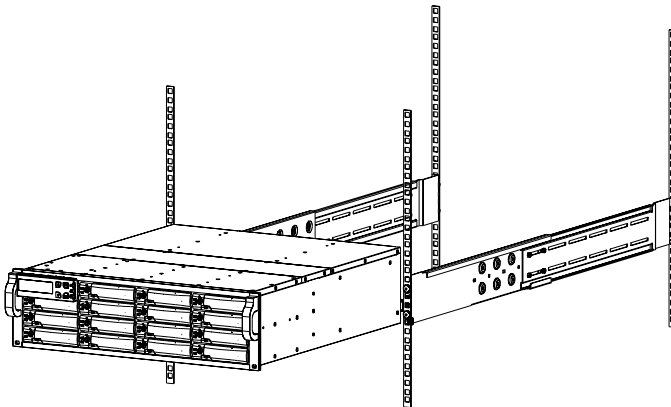


Figure 2.

2. Fasten two M5 screws through the chassis ears in the front side of the

chassis to secure the Alnico subsystem in the rack as Figure 3.

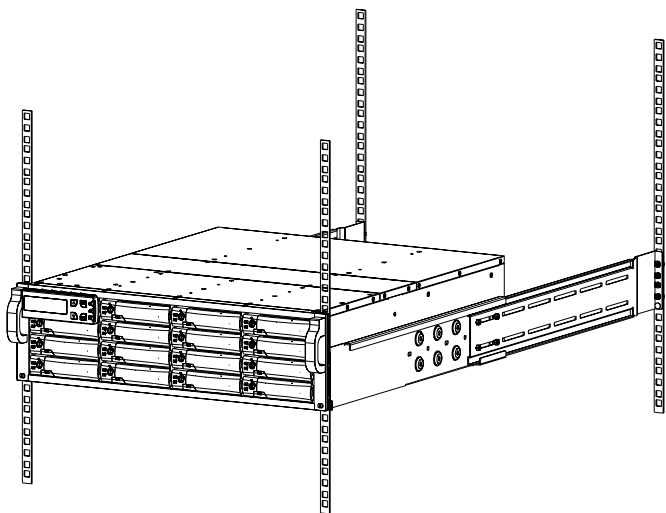


Figure 3.



Caution

Caution

The Alnico subsystem is heavy, two person are required to move the system in the procedure.

System Connection

Connect all cables and power cord as shown below :

Cable	Alnico JBOD	Device	Purpose
Serial Cable	Terminal Port	ANSI Terminal ora PC with Terminal emulator.	Configuration Utility
Mini SAS Cable	SAS CH0	SAS HBA of Host computer Alnico SAS RAID subsystem	Host interface between JBOD and Host computer
Power Cord	Power inlet	A/C power outlet	A/C power input
Mini SAS Cable	SAS Exp.	Alnico JBOD	Connect to SAS Expander




Note

Make sure that all the devices are powered off before connecting or removing cables to prevent power spikes which can damage technical components.


Connection to the RAID System (Basic)

16Bays Fibre RAID

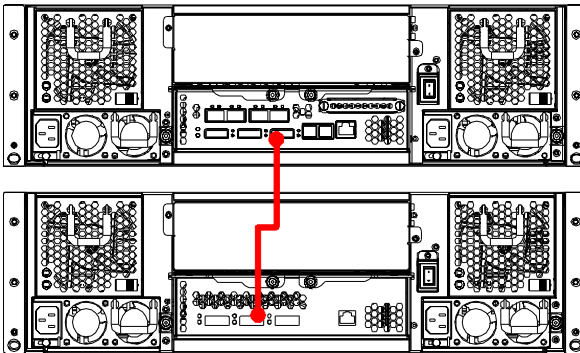

16bays JBOD

Connection to the RAID System with more SAS JBODs

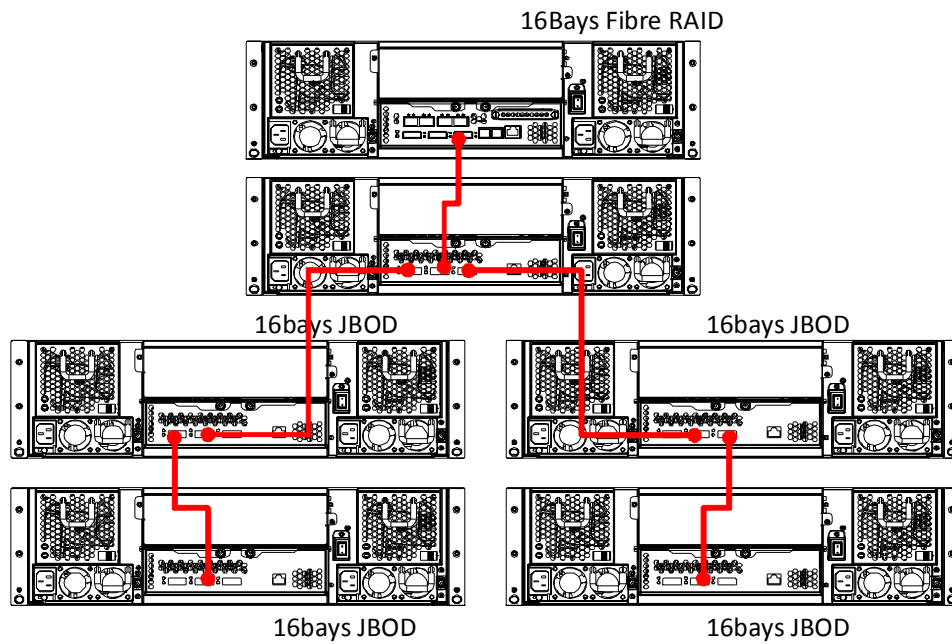

It supports up to four tiers and 122 drives.

- One RAID Set supports up to 32 HDDs
- One SAS Raid subsystem supports up to 122 Volumes
- One SAS Raid subsystem supports up to 122 SAS devices

There are four tiers within JBOD topology as above:

- First tier is a RAID System.
- Second tier is a SAS JBOD with a SAS CH0 on it. Connecting SAS CH0 to SAS exp. Port on RAID System via a Mini SAS to Mini SAS Cable.
- Third tier could be two SAS JBODs with a SAS CH0 port individually. One is connected to the SAS EXP. Port on the second tier SAS JBOD via a Mini SAS to Mini SAS Cable. Another is connected to the SAS CH1/E Port on the second tier SAS JBOD

- Fourth tier is a SAS JBOD with a SAS CH0 on it. Connecting SAS CH0 to SAS exp. Port on third tier SAS JBOD via a Mini SAS to Mini SAS Cable.



1. *Alnico Gen 2 RAID subsystem do not require the installation of different drivers for use with different operating systems. Alnico Gen 2 RAID is independent and transparent to the host operating system.*
 2. *It is often recommended to install the hard drive with same brand, model no., interface and capacity in this RAID subsystem.*
 3. *Please do not install SAS and SATA hard drives at the same time, as these hard drives spin at different speed and may lead to compatible issues or performance decline.*
 4. *RAID members need to be included at the same enclosure that means you need to create array in the same enclosure. RAID members across two or more enclosures would get some risks (for example: if mini-SAS cable get problem, more RAID members will be lost, volume sets belong to this Array may be failed. Shutdown RAID and JBOD to fix problem, after that, turn on JBOD and RAID system again and controller will get array back, but in some special case maybe it can't get array back)*
-

Turning on for the first time

When cabling is completed, SAS RAID system + SAS JBOD system can be turned on. This should be done in the following order:

1. First turn on the power switch of "SAS JBOD" system.
2. Then turn on the power switch of "SAS RAID" system
3. Power on and boot the host computer(s)

Turning off

When turning off SAS RAID system + SAS JBOD system, users are advised to first shut down the server, then power off SAS RAID SYSTEM ,finally power off SAS JBOD SYSTEM.

Chapter 3. TROUBLE SHOOTING

This chapter contains trouble shooting procedures and suggestions to minimize their impact on the Alnico JBOD operation :

⇒ **Instructions on how to replace the components of Alnico JBOD subsystem.**

If the fault LED on the front panel of Alnico JBOD lights , or if Alnico RAID's Internet manager indicates a fault of JBOD, determine the reason for this alert immediately. Examine the component LEDs to see if any indicates a fault, then replace it as soon as possible.

Replace the Expander box




Caution

Read the replacing notices earlier in this chapter before proceeding with replacement.

This section provides instructions for the removal and installation of the Expander box components indicated in the figure below. This section is for the reference of engineers. End users should not need to replace or remove components.

Removing the JBOD Expander box from AN-616 and AN-624 JBOD :


In order to access expander box, turn anti-clock wise to release two thumb screws, then use the eject bar to remove controller box.

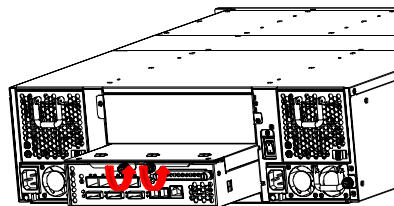

Removing the JBOD Expander box from AN-612 JBOD :

In order to access controller box,

1. Turn anti-clock wise to release the thumb Screws.

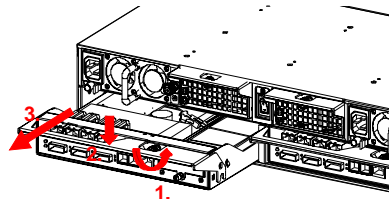

2. Push down the use eject bar to remove controller box.

Installing the Expander box into JBOD subsystem:

Reverse the procedure of “**removing the controller**” to install the controller into Alnico RAID.


Then according to “Appendix C. Configuration table” on “Soft Operation Manual” to reconfigure your RAID

Hot Swapping to replace the Fan Module

This section provides instructions for the removal and installation of the Fan Module indicated in the figure below.


Removing the Fan Module from AN-616 and AN-624 :


Remove the Fan modules by slide the release button left and pull the module out of system.

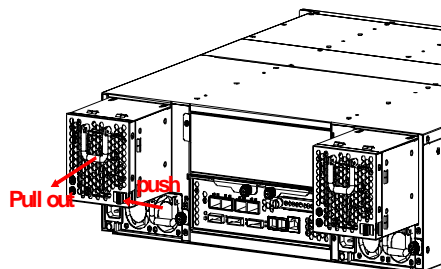

Replace the Fan in Fan module

1. There are two failure LEDs on the rear of Fan module. Check which LED lights to yellow.
2. Remove the Fan modules by anti-clock wise to release the thumb screw then slide it back and lifting off.
3. Release the screw to remove the defect fan.
4. Insert the spare Fan and fasten the screw.

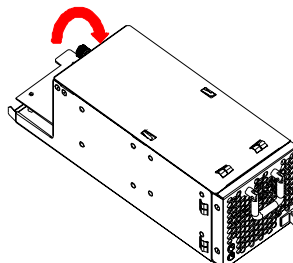


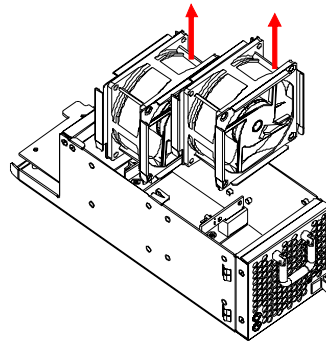

Removing the Fan Module from AN-612 :

In order to access controller box,

1. Turn anti-clock wise to release the thumb Screws.
2. Push down the use eject bar to remove controller box.
3. Remove the Fan modules by pull the module out of system.

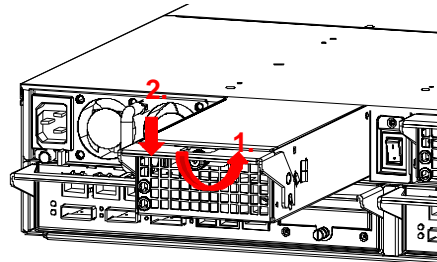

Replace the Fan in Fan module


5. There are two failure LEDs on the rear of Fan module. Check which LED lights to yellow.
6. Remove the Fan modules by anti-clock wise to release the thumb screw then slide it back and lifting off.
7. Release the screw to remove the defect fan.
8. Insert the spare Fan and fasten the screw.

Hot Swapping to replace the Power Module

This section provides instructions for the removal and installation of the Power Module indicated in the figure below.

Removing the Power Module

Unscrew the thumb fastener, then push right the release button, slide it back and lifting off.

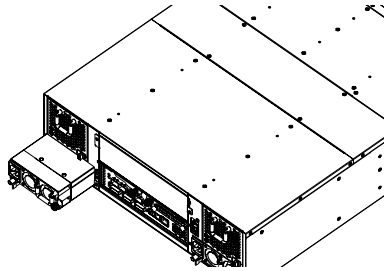

Installing the Power module into Alnico:


Insert a Power module then fasten the screw.



The Power indicator will turn bright “Green” to indicate it has powered on


Appendix A. Connectors

RJ-11

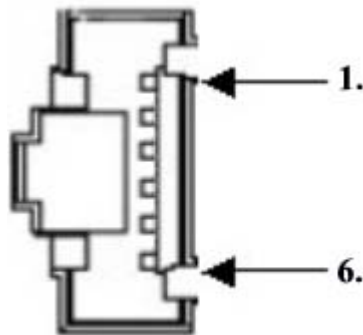

Pin#	Signal	Pin#	Signal
1	NC	6	NC
2	GND		
3	RX		
4	TX		
5	CTS		

miniSAS (SFF-8088)

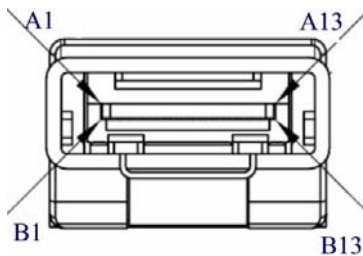


Pin#	Signal	Pin#	Signal
A1	GND	B1	GND
A2	RX0+	B2	TX0-
A3	RX0-	B3	TX0+
A4	GND	B4	GND
A5	RX1+	B5	TX1-
A6	RX1-	B6	TX1+
A7	GND	B7	GND
A8	RX2+	B8	TX2-
A9	RX2-	B9	TX2+
A10	GND	B10	GND
A11	RX3+	B11	TX3-
A12	RX3-	B12	TX3+
A13	GND	B13	GND


Appendix B. Firmware Updating

The procedure to update firmware of JBOD shall thru the UART, please refer to “**Appendix C. Command Line Interface**” to create a CLI connection, then follow the steps as bellowing to update the firmware of JBOD.

1. First type "fdl code 0" under "CLI>" prompt,

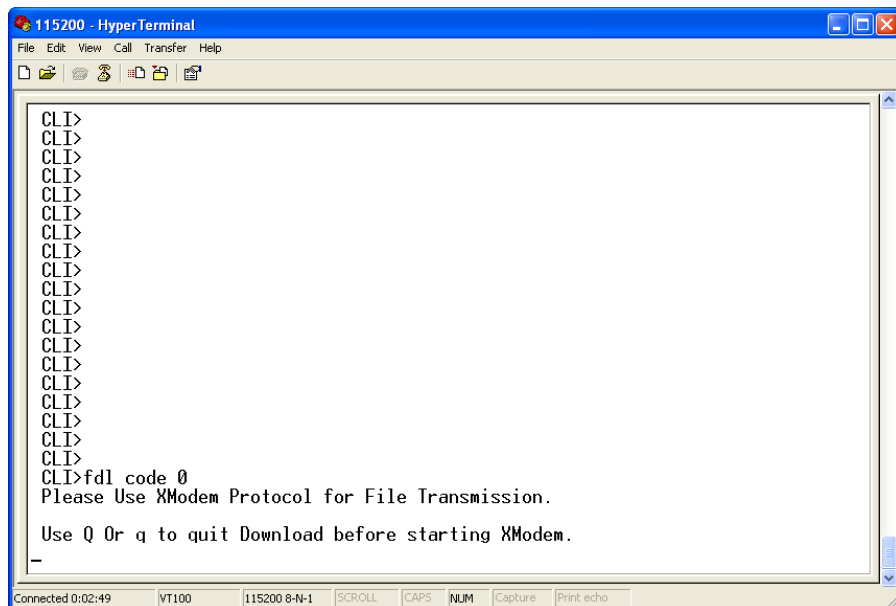

2. Then under hyper terminal click “file” at top to pull down the menu. Choose "Xmodem" and select the firmware file in the directory then press send to attach file. If file is receiving within the timeout limit (60sec), then firmware update will proceed. If a timeout message appear, please retry the step 2 again.

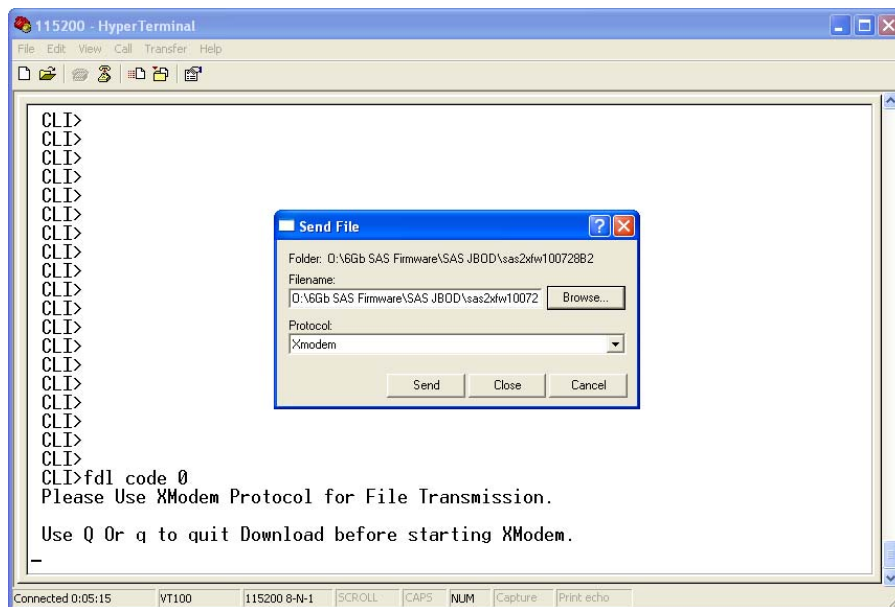

The firmware date are presented in the following filename format,

- a. FW file(code):sas2xfwXXXX.fw
 - b. Data file(mfgeb): mfgdat6gYYYY.rom
3. Firmware update procedure can be stopped by pressing Q or q.
 6. Perform a cold-start after the firmware updating is completed.
 7. After the firmware updating is completed, repeat steps 1-6 to update the Data file, but change the CLI command as following.
CLI> fdl mfgeb 0
Then use file "mfgdata.rom" to update the Datafile.
 8. After both files are updated, restart the expander.

Appendix C.

Command Line Interface (CLI)

Create a CLI connection

The SAS JBOD has a **Command Line Interface (CLI)** to manage all of its functions, including customization. Access the CLI via your PC's terminal VT100 or ANSI emulation program, such as Microsoft HyperTerminal.

With the SAS JBOD running and the RS-232 cable connected to the Terminal port on SAS JBOD

1. open any UART communication tools like Hype Terminal

- Bits per second: 115200
- Data bits: 8
- Parity: None
- Stop bits: 1

2. press any key on HyperTerminal window, the window will show " Password : " prompt (Default Password :0000)

3. Enter Password, the window will show "CLI>" prompt

4. Type help will show help screen.

CLI Command Set

The CLI has the following commands:

HELP - Show All CLI commands and its usage

Usage: help

Example:

CLI>help

```
=====
Test          Command
```

Set Password	pass
Logout CLI shell	lo
Link rate Control	link Index(D) High-Rate(D) Low-Rate(D) link
Temperature Control	th Index(D) High-Warn(D) Low-Warn(D) th
System Information	sys
Alarm Control	bu {mute [warning(D) critical(D)]} Bu
Fan Speed Control	fan LowestSpeed(D) WarningSpeed(D) fan
Drive SpinUp Control	spin Delay(D)[ms] Num(D) spin
Store System Setting	st
List Devices Status	lsd [hdd temp volt pwr con ..]
Resets the expander	reset watchdog(optional)
Route Table Read	rtr Display[(Default)/d/z/dz] Default display enabled entries with a nonzero SAS address d include disabled entries z include entries with a zero SAS address

	dz display all entries
Show the current logs	showlogs DisplayMode(hex, detail, default)
Clear the logs	clearlogs
Add string to the log	log "string"
File DownLoad	fdl { code mfgb ..} Buffer-Offset(H) Erase[Y(Default)/ N]
Display Info for all phys	phyinfo Help[?]
Display/Reset all phy counters	counters reset(optional)
Display expander SAS address	sasaddr
CLI Help	help command

=====

Pass - Set Password

Usage: pass (Max. 8 chars, Min. 4 chars)

Example:

CLI>pass

Old Password:****

New Password:****

verify new Password:****

Update Successfully But Not Save Permanently!

LO - Logout CLI shell

Usage: lo

Example:

CLI>lo

Pasword:

LINK - Link rate Control

Usage: link

Example:

CLI>link

ArrayDevice Element (0x17):

```
=====
```

NAME	PHY	NLR	MAX	MIN	TYPE	ADDRESS
SLOT 01	7	6.0G	10	8	SAS	5000C500-103F7AA5
SLOT 02	6	6.0G	10	8	SAS	5000C500-10439631
SLOT 03	11	6.0G	10	8	SAS	5000C500-10438DFD
SLOT 04	10	6.0G	10	8	SATA	5001B4D5-060E700A
SLOT 05	3	6.0G	10	8	SATA	5001B4D5-060E7003
SLOT 06	4	6.0G	10	8	SATA	5001B4D5-060E7004
SLOT 07	12	6.0G	10	8	SATA	5001B4D5-060E700C
SLOT 08	14	6.0G	10	8	SATA	5001B4D5-060E700E
SLOT 09	1	6.0G	10	8	SATA	5001B4D5-060E7001
SLOT 10	2		10	8		
SLOT 11	13		10	8		
SLOT 12	15		10	8		
SLOT 13	5		10	8		
SLOT 14	0		10	8		
SLOT 15	8		10	8		
SLOT 16	9		10	8		

TH - Operate the Thermal Attribute

Usage: th

Example:

CLI>th

Temperature Element (0x04):

```
=====
```

NAME	ID	CT('C)	HTW	LTW	OTWarn
ENC. Temp	01	27	60	5	No
Chip Temp	02	53	85	5	No
Slot01 Temp	03	26	60	5	No
Slot02 Temp	04	28	60	5	No
Slot03 Temp	05	27	60	5	No
Slot04 Temp	06	NA	60	5	No
Slot05 Temp	07	NA	60	5	No
Slot06 Temp	08	NA	60	5	No
Slot07 Temp	09	NA	60	5	No
Slot08 Temp	10	NA	60	5	No
Slot09 Temp	11	NA	60	5	No
Slot10 Temp	12	NA	60	5	No
Slot11 Temp	13	NA	60	5	No
Slot12 Temp	14	NA	60	5	No
Slot13 Temp	15	NA	60	5	No
Slot14 Temp	16	NA	60	5	No
Slot15 Temp	17	NA	60	5	No
Slot16 Temp	18	NA	60	5	No

SYS - Print System Information

Usage: sys

Example:

CLI>sys

```
=====
```

Hardware Revision Information:-

```
=====
```

Vendor ID	:
Model ID	: 8016

Serial No. : 8888888888888888
Unit Serial No. :
Expander SAS Address : 0x5001B4D5060E703F
Product Revision : 0
Expander Chip ID : 0x0221 (Ports : 28)
Expander Chip Revision : B3
Customer Code : 0x2
Manufacturer Data Revision : 0x05
Working Time : Day00000-00:22:03

=====

Firmware Revision Information:-

=====

Active Firmware: Active Image

Boot Image:

Revision: 7.B0.02.8F 11/15/10

Firmware Family: 1 OemFamily: 0

Fast Boot: No Image Address: 0x14000000

Active Image:

Revision: 7.B0.02.8F 11/15/10

Firmware Family: 1 OemFamily: 0

Fast Boot: No Image Address: 0x14080000

Backup Image:

Revision: 7.B0.02.8F 11/15/10

Firmware Family: 1 OemFamily: 0

Fast Boot: No Image Address: 0x14100000

HAL Revision: 0.7.0.0 SES Revision: 0.7.0.0 SCE Revision: 0.7.0.0

BU - Operate the Buzzer Attribute

Usage: bu [MUTE]**Example:**

```
CLI>bu
```

```
AudibleAlarm Element (0x06):
```

```
=====
```

NAME	STATUS	ALMSTATE
Audible-Alarm	Normal	0

```
Current Alarm Attribute:
```

```
Warning Alarm: Sound2
```

```
Critical Alarm: Sound3
```

```
CLI>
```

```
turn off buzzer
```

```
CLI>bu mute
```

```
Alarm beep Muted
```

```
CLI>
```

FAN - Operate the Fan Attribute**Usage : fan****Example:**

```
CLI>fan
```

```
Cooling Element (0x03):
```

```
=====
```

SPEED			
NAME	CODE	RPM	STATUS
Fan 01	5	3800	OK
Fan 02	5	3870	OK
Fan 03	5	3870	OK
Fan 04	5	3870	OK

Saved FAN Speed Attribute:

Lowest SpeedCode: 5

Warning SpeedCode: 7

ST - Store System Setting

Usage: st

Example:

CLI>st

ALL Of The User Configurations are Saved.

CLI>

LSD – List Devices Status

Usage: lsd

Example:

CLI>lsd

Show SES elements information

ArrayDevice Element (0x17):

```
=====
```

NAME	PHY	NLR	MAX	MIN	TYPE	ADDRESS
SLOT 01	7	6.0G	10	8	SAS	5000C500-103F7AA5
SLOT 02	6	6.0G	10	8	SAS	5000C500-10439631
SLOT 03	11	6.0G	10	8	SAS	5000C500-10438DFD
SLOT 04	10	6.0G	10	8	SATA	5001B4D5-060E700A
SLOT 05	3	6.0G	10	8	SATA	5001B4D5-060E7003
SLOT 06	4	6.0G	10	8	SATA	5001B4D5-060E7004
SLOT 07	12	6.0G	10	8	SATA	5001B4D5-060E700C
SLOT 08	14	6.0G	10	8	SATA	5001B4D5-060E700E
SLOT 09	1	6.0G	10	8	SATA	5001B4D5-060E7001
SLOT 10	2		10	8		
SLOT 11	13		10	8		

SLOT 12	15	10	8
SLOT 13	5	10	8
SLOT 14	0	10	8
SLOT 15	8	10	8
SLOT 16	9	10	8

Connector Element (0x19):

=====

NAME	PHY	NLR	TYPE	ROUTE	CONNECTED-ADDRESS
Connector00	24	02			
Connector00	25	02			
Connector00	26	02			
Connector00	27	02			
Connector01	20	6.0G 02	S	5001B4D5-0163B03F	
Connector01	21	6.0G 02	S	5001B4D5-0163B03F	
Connector01	22	6.0G 02	S	5001B4D5-0163B03F	
Connector01	23	6.0G 02	S	5001B4D5-0163B03F	
Connector02	16	02			
Connector02	17	02			
Connector02	18	02			
Connector02	19	02			

Cooling Element (0x03):

=====

SPEED

NAME	CODE	RPM	STATUS
Fan 01	5	3800	OK
Fan 02	5	3870	OK
Fan 03	5	3870	OK
Fan 04	5	3870	OK

Temperature Element (0x04):

=====

NAME	ID	CT('C)	HTW	LTW	OTWarn
ENC. Temp	01	27	60	5	No
Chip Temp	02	37	85	5	No
Slot01 Temp	03	27	60	5	No
Slot02 Temp	04	28	60	5	No
Slot03 Temp	05	27	60	5	No
Slot04 Temp	06	27	60	5	No
Slot05 Temp	07	27	60	5	No
Slot06 Temp	08	27	60	5	No
Slot07 Temp	09	27	60	5	No
Slot08 Temp	10	27	60	5	No
Slot09 Temp	11	26	60	5	No
Slot10 Temp	12	NA	60	5	No
Slot11 Temp	13	NA	60	5	No
Slot12 Temp	14	NA	60	5	No
Slot13 Temp	15	NA	60	5	No
Slot14 Temp	16	NA	60	5	No
Slot15 Temp	17	NA	60	5	No
Slot16 Temp	18	NA	60	5	No

Voltage Element (0x12):

=====				
NAME	VOLT(V)	OVLMT	UVLMT	STATUS
1V	0.97	1.07	0.94	None
5V	5.04	5.32	4.63	None
3.3V	3.21	3.53	3.05	None
12V	11.92	12.80	11.12	None

PowerSupply Element (0x02):

=====	
NAME	STATUS
PowerSupply01	OK
PowerSupply02	OK

AudibleAlarm Element (0x06):

```
=====
NAME          STATUS  ALMSTATE
Audible-Alarm Normal    None
CLI>
```

RESET - System Software Reset

Usage: reset → Reset SAS JBOD

SHOWLOGS - Print System Log.

Usage: showlogs

CLEARLOGS - Print System Log.

Usage: showlogs

FDL - File DownLoad

Usage: fdl { code | mfgb } offset → Upgrade F/W command

Then use XModem/(Checksum) protocol transmit file to update ROM Region

Appendix D. Specifications

Specifications

Model	AL-624J6	AL-616J6	AL-612J6
System Type	4U Rackmount	3U Rackmount	2U Rackmount
Expander numbers	1 or 2	1 or 2	1 or 2
Host Interface	Single minSAS connectors (4 x 6Gb Links) / Expander		
Host Transfer Rate	6Gb/ Sec		
Disk Interface	SAS 6.0 Gbps/ Port 2 x minSAS for Expansion		
Disk Channel	24 x SAS 6.0Gb/6.0GSATA	16x SAS 6.0Gb/6.0 GbSATA	12 x SAS 3.0Gb/6.0 Gb SATA
Hot Swap and redundant	Yes (Expander box, Power Supply, Drive and Fan).		
Hot Spare	Yes (Drive).		
Monitoring / Indicators	Through In-band SES (SCSI Enclosure Service) LED Indicators on Front Panel		
Remote Terminal Configuration	Yes.		
Operating Systems	O/S Independent and Transparent		
Power Supply	500+500+500 watts Redundancy 80 Plus energy-Efficient power system, Three 500 watts module with PFC function. Load sharing type and cable-less design with Redundancy Three Power inlet	500+500 watts Redundancy 80 Plus energy-Efficient power system, two 500 watts module with PFC function. Load sharing type and cable-less design with Redundancy Dual Power inlet	
Electrical	AC Voltage 100-240 VAC Ac Frequency 47-63Hz		
Temperature	Operating Temperature : 5 to 35 degree C. Non Operating Temperature : -40 to 60 degree C.		
Relative Humidity	20% to 80% non-condensing		
Dimensions	446.5mm(W)*517mm(D)*4U	446.5mm(W)*517mm(D)*3U	446.5mm(W)*527mm(D)*2U



NOTE

Specifications subject to change without notice.